


DESCRIPTION


TOKO's LTF3216L-F2R4G is a ceramic multilayer low pass filter for RF LAN applications. It is an ultra compact solution, ideal for keeping unwanted PA and LO harmonics out of the system. TOKO's proprietary ceramic materials and multilayer manufacturing process are utilized for excellent performance and exceptional reliability.

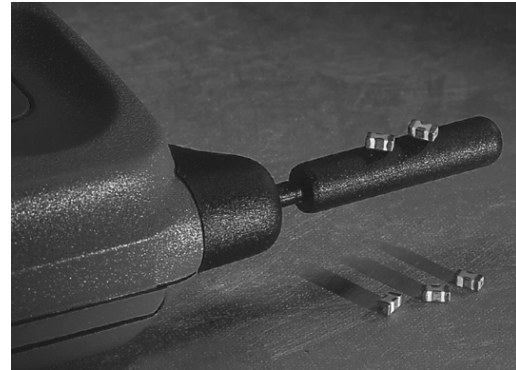

FEATURES

- Miniature footprint: 3.2 x 1.6 mm
- Low profile: 1.6 mm max.
- Low insertion loss: 0.6 dB max.
- Allowable Power: 3 W
- Operating temperature: -25°C to +80°C
- Storage temperature: -40°C to +85°C
- Flow and reflow solderable
- Packaged on 2,000 piece reels


DIMENSIONS

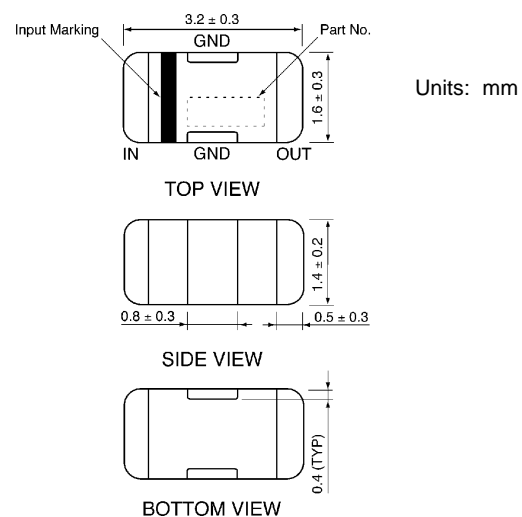


ELECTRICAL SPECIFICATIONS

TOKO Part Number	Nominal Frequency (MHz)	BW (MHz)	Insertion Loss (dB max.)	Bandwidth VSWR	Attenuation @2×(F _o ±BW) (dB min.)	Attenuation @3×(F _o ±BW) (dB min.)	Impedance
LTF3216L-F2R4G	2450	±100	0.6	1.5	30.0	18.0	50 Ω


TYPICAL CHARACTERISTICS

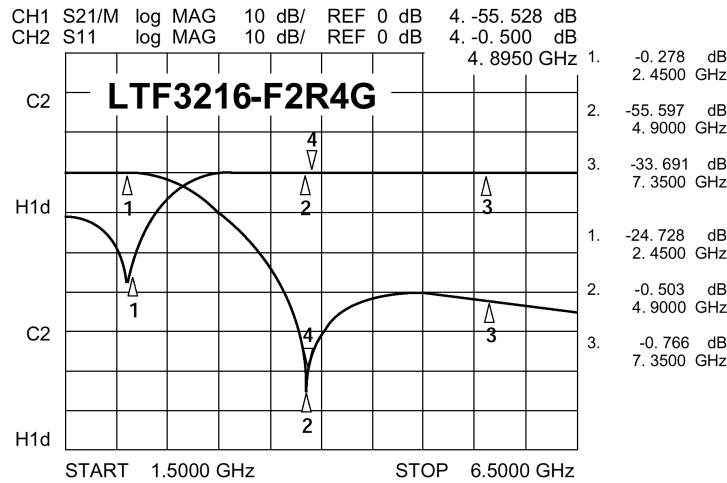

MEASUREMENT CIRCUIT

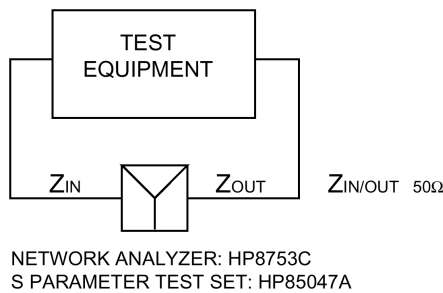

RECOMMENDED FOOTPRINT

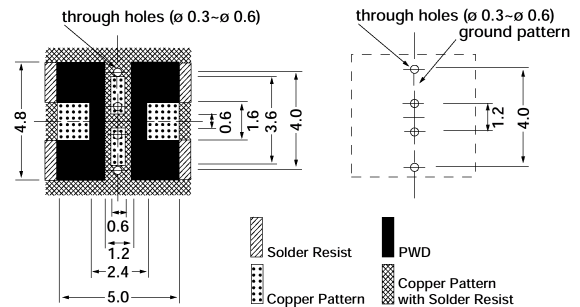

The information furnished by TOKO, Inc., is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification, or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.