






FEATURES & APPLICATIONS



- ◆ High resistance to heat and humidity and accurate dimensions for automatically surface mount technology
- ◆ Mobile phones
- ◆ Telecommunication systems
- ◆ Computer products



SMA 455625





SMA 604515

DIMENSIONS (mm)

No.	Part No.	Impedance (Ω)		Size (mm)				
		25MHz	100MHz	A	B	C	D	E
1	SMA 455625	23 Ref.	35 Ref.	4.5 ± 0.20	5.6 ± 0.20	3.0 ± 0.15	1.40 ± 0.15	2.54 ± 0.20
2	SMA 604515	23 Ref.	50 Ref.	5.6 ± 0.30	5.0 Max.	1.5 ± 0.20	1.40 ± 0.15	1.30 ± 0.20

Test frequency is 25MHz, 100MHz.

CHARACTERISTICS IMPEDANCE & FREQUENCY

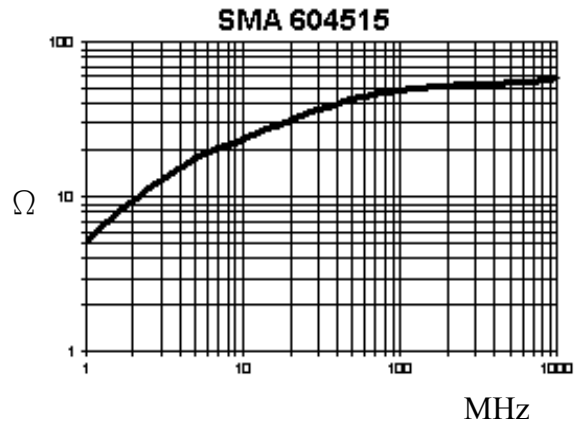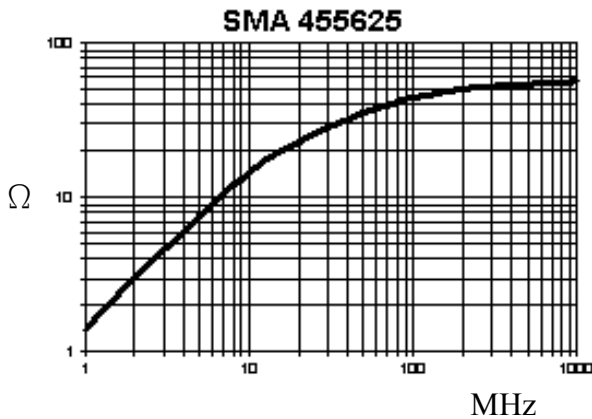

PACKAGE

Type	SMA 455625	SMA 455625	SMA 604515
Q'TY/Reel	500	2,000	1,000
Reel size	7"	13"	7"