




TAP Series Time Lag Type With Pigtail

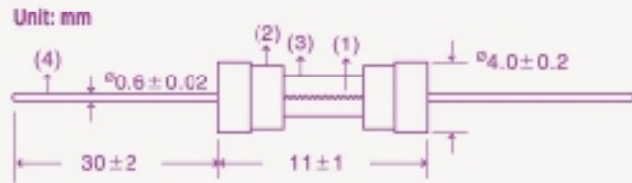

Structure

No.	Component	Material
1	Wire	Alloy
2	Cap	Brass with nickel plated
3	Body	Glass tube
4	Lead	Tinned copper wire

Electrical characteristics

Rated current	200%			500%			1000%		
	Max.			Min.			Min.		
100 mA-6.3A	60 Sec.			80 mS			10 mS		

Breaking capacity

50 A	125 V / 250 V	A C
------	---------------	-----


Temperature character

When 100% of rating the temperature rise doesn't exceed 75°C.



Approvals

Catalogue number	Rated current	Voltage	UL US	UL	SP
TAP	100 mA-6.3A	125V / 250V	●	●	●

● Approved 已認證 ○ Pending 認證中

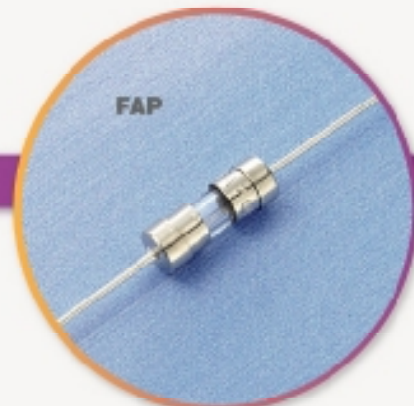

FAP Series Fast Acting Type With Pigtail

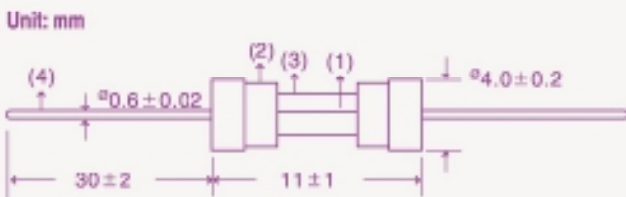

Structure

No.	Component	Material
1	Wire	Alloy
2	Cap	Brass with nickel plated
3	Body	Glass tube
4	Lead	Tinned copper wire

Electrical characteristics

Rated current	200%
100 mA-6.3A	Max. 60 Sec.

Breaking capacity

50 A	125 V / 250 V	A C
------	---------------	-----

Temperature character

When 100% of rating the temperature rise doesn't exceed 75°C.

Approvals

Catalogue number	Rated current	Voltage	UL US	UL	SP
FAP	100 mA-6.3A	125V / 250V	●	●	●

● Approved 已認證 ○ Pending 認證中

FAP

Rating	Norminal Melting(A ² Sec)
100mA	0.00160
125mA	0.00500
150mA	0.00600
160mA	0.00600
200mA	0.01600
250mA	0.02500
300mA	0.03500
315mA	0.04100
350mA	0.05600
375mA	0.07200
400mA	0.08000
500mA	0.15300
600mA	0.21800
630mA	0.27900
700mA	0.45400
750mA	0.50500
800mA	0.52000
1A	0.91300
1.25A	1.79000
1.5A	2.12000
1.6A	3.62000
2A	2.64000
2.5A	4.23000
3A	6.30000
3.15A	7.71000
3.5A	9.12000
4A	11.50000
5A	17.20000
6A	24.90000
6.3A	28.40000
7A	37.00000
8A	
9A	
10A	
11A	
12A	
13A	
14A	
15A	

003

PS :

以上數值僅供參考

Above Norminal Melting vaules are for reference only.

若有其它需求請與業務人員聯絡

If you need other ratings please don't hesitate to contact the salesperson.

TAP

Rating	Norminal Melting(A ² Sec)
100mA	0.02000
125mA	0.03600
150mA	0.05300
160mA	0.10000
200mA	0.12000
250mA	0.13000
300mA	0.28000
315mA	0.30000
350mA	0.45000
375mA	0.46000
400mA	0.60000
500mA	0.78000
600mA	0.79000
630mA	1.01000
700mA	
750mA	1.07000
800mA	1.09000
1A	4.59000
1.25A	5.22000
1.5A	7.50000
1.6A	7.51000
2A	19.84000
2.5A	27.40000
3A	42.90000
3.15A	46.20000
3.5A	49.60000
4A	67.70000
5A	110.00000
6A	111.00000
6.3A	112.00000
7A	
8A	
9A	
10A	
11A	
12A	
13A	
14A	
15A	

008

PS :

以上數值僅供參考

Above Norminal Melting vaules are for reference only.

若有其它需求請與業務人員聯絡

If you need other ratings please don't hesitate to contact the salesperson.