

2 Elements Surface Mount Mini Series(2SM & 2SSM)

ACPA-2SM Ø4mm ,4.2mm long

Specifications

Model Name	DC Breakdown Voltage	Maximum Impulse Breakdown Voltage		Maximum Impulse Discharge Current (8/20 μs)		Normal Alternating Discharge Current		Impulse Life (10/1000μs) (100A)	DC Holdover Voltage (V)	Minimum Insulation Resistance (GΩ)	Maximum Capacitance (pf)
	(V)	(V)	(V)	(KA)	(A)	(A)	(A)				
	100V/s	100V/μs	1000V/μs	1 time	10 times	50Hz, 1sec	Single 9cycles	times	<150ms	Note3	1MHZ
2SM-75	75 ±20%	700	800	5	3	3	6	300	52	1	0.5
2SM-90	90 ±20%	700	800						52	1	0.5
2SM-145	145 ±20%	700	800						52	1	0.5
2SM-230	230 ±20%	600	700						80	1	0.5
2SM-250	250 ±20%	600	700						80	1	0.5
2SM-300	300 ±20%	600	700						150	1	0.5
2SM-350	350 ±20%	650	800						150	1	0.5
2SM-400	400 ±20%	700	800						150	1	0.5
2SM-470	470 ±20%	800	900						150	1	0.5
2SM-600	600 ±20%	900	1000						150	1	0.5

Note1 : UL497B Recognized, File E324754

Note2 : The 2SM is round and 2SSM is square

Note3 : DC Breakdown Voltage DC Measuring Voltage

70-90V

50V


120-400V

100V

470-600V

250V

Dimensions

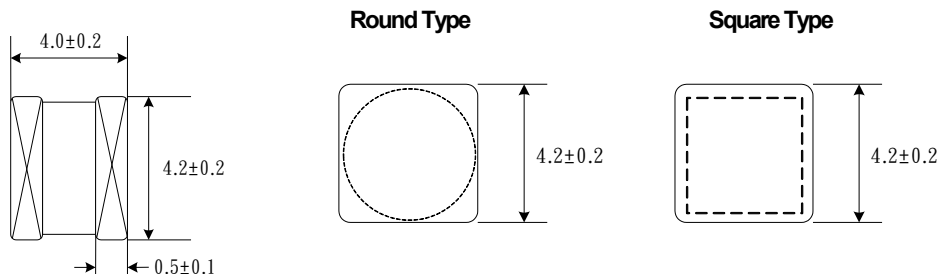

Recommended Pad Size

