





RCSB Series 系列 贴片组立式大电流电感 RCSB 系列

RCSB 06 Series 系列



2:1

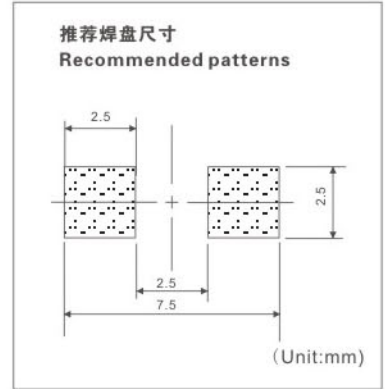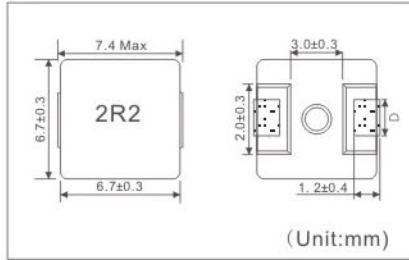


电气性能 Electrical characteristics

RCSB 0630 系列

产品编号 Part No.	电感值 Inductance L(uH) ± 20%	直流电阻(mΩ) DC Resistance Max	温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A)Max	尺寸 (单位: mm) Dimensions(unit:mm)	
					H ± 0.4	D: Ref
RCSB0630-R10M	0.10	1.5	35.0	30.0	3.0	1.2
RCSB0630-R22M	0.22	2.5	20.0	25.0	3.0	1.2
RCSB0630-R33M	0.33	4.0	17.0	24.0	3.0	1.2
RCSB0630-R47M	0.47	4.0	15.0	23.0	3.0	1.2
RCSB0630-R68M	0.68	7.0	12.0	20.0	3.0	1.2
RCSB0630-R82M	0.82	7.0	10.0	19.0	3.0	1.2
RCSB0630-1R0M	1.0	9.0	9.0	18.0	3.0	1.2
RCSB0630-1R5M	1.5	14.0	6.0	16.0	3.0	1.2
RCSB0630-2R2M	2.2	16.0	5.0	14.0	3.0	1.2

直流重叠、温升特性曲线图 DC Bias & Temperature Characteristics

RCSB 0630 系列

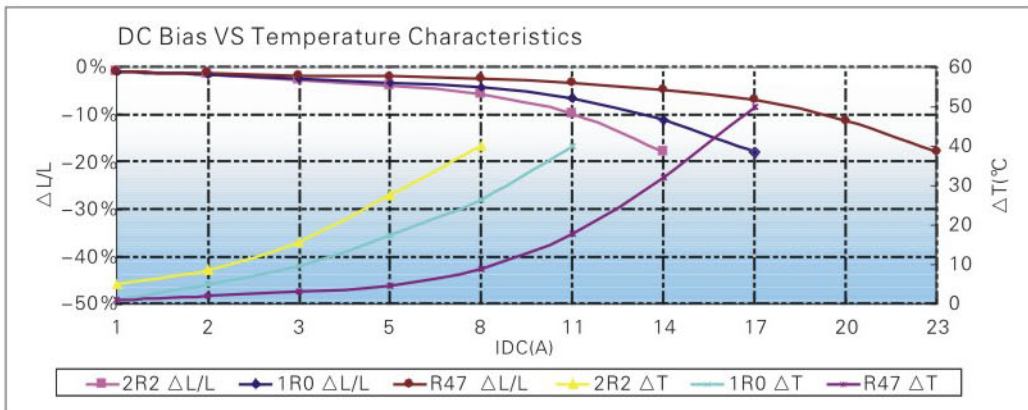

* 规格和参数仅供参考，更多的型号与规格，请关注我司网站或来电咨询。
The specifications and parameters are for reference only. More model and specification, Pay attention to our website or to inquire.



RCSB Series 系列 贴片组立式大电流电感 RCSB 系列

RCSB 06 Series 系列


电气性能 Electrical characteristics

RCSB 0640 系列

产品编号 Part No.	电感值 Inductance L(μH) ± 20%	直流电阻(mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A)Max	尺寸 (单位: mm) Dimensions(unit:mm)	
		Max				H ± 0.4	D:Ref
RCSB0640-R33M	0.33	2.5		22.0	20.0	4.0	1.2
RCSB0640-R47M	0.47	2.5		19.0	17.0	4.0	1.2
RCSB0640-R68M	0.68	4.0		17.0	16.0	4.0	1.2
RCSB0640-R82M	0.82	5.5		16.0	14.0	4.0	1.2
RCSB0640-1R0M	1.0	8.0		15.0	12.0	4.0	1.2
RCSB0640-1R5M	1.5	9.0		12.0	10.0	4.0	1.2
RCSB0640-2R2M	2.2	13.0		10.0	7.0	4.0	1.2
RCSB0640-3R3M	3.3	25.0		7.0	6.0	4.0	1.2
RCSB0640-4R7M	4.7	32.0		6.0	5.0	4.0	1.2

直流重叠、温升特性曲线图 DC Bias & Temperature Characteristics

RCSB 0640 系列

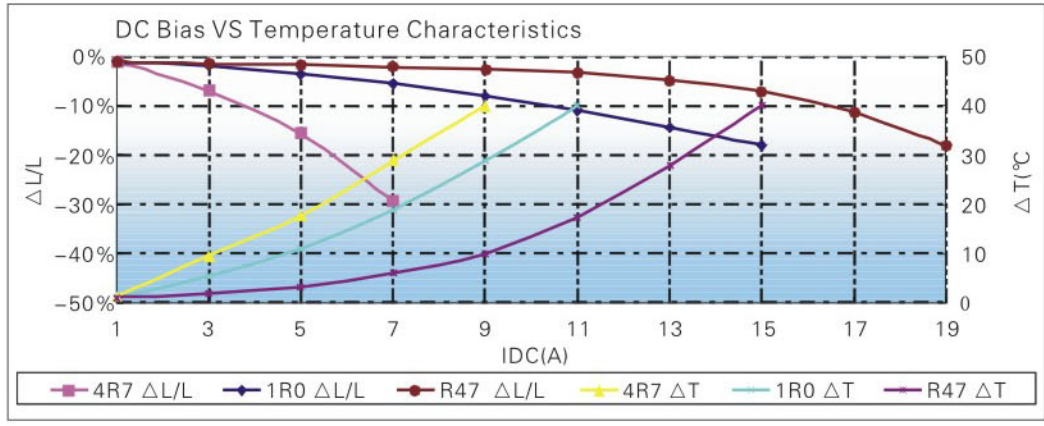

* 规格和参数仅供参考，更多的型号与规格，请关注我司网站或来电咨询。
The specifications and parameters are for reference only. More model and specification, Pay attention to our website or to inquire.

RCSB Series 系列 贴片组立式大电流电感 RCSB 系列

RCSB 06 Series 系列


电气性能 Electrical characteristics

RCSB 0650 系列

产品编号 Part No.	电感值 Inductance	直流电阻(mΩ) DC Resistance	温升电流 Heat Rated Current	饱和电流 Saturation Current	尺寸 (单位: mm) Dimensions(unit:mm)	
	L(uH) ± 20%	Max	(A)Max	(A)Max	H ± 0.4	D:Ref
RCSB0650-R68M	0.68	2.5	16.0	15.0	5.0	1.2
RCSB0650-R82M	0.82	3.5	15.0	13.0	5.0	1.2
RCSB0650-1R0M	1.0	6.0	13.0	11.0	5.0	1.2
RCSB0650-1R5M	1.5	7.0	12.0	9.0	5.0	1.2
RCSB0650-2R2M	2.2	8.0	11.0	8.0	5.0	1.2
RCSB0650-3R3M	3.3	12.0	9.0	7.0	5.0	1.2
RCSB0650-4R7M	4.7	25.0	8.0	6.5	5.0	1.2
RCSB0650-6R8M	6.8	35.0	6.0	5.5	5.0	1.2
RCSB0650-100M	10.0	50.0	5.0	4.0	5.0	1.2

直流重叠、温升特性曲线图 DC Bias & Temperature Characteristics

RCSB 0650 系列

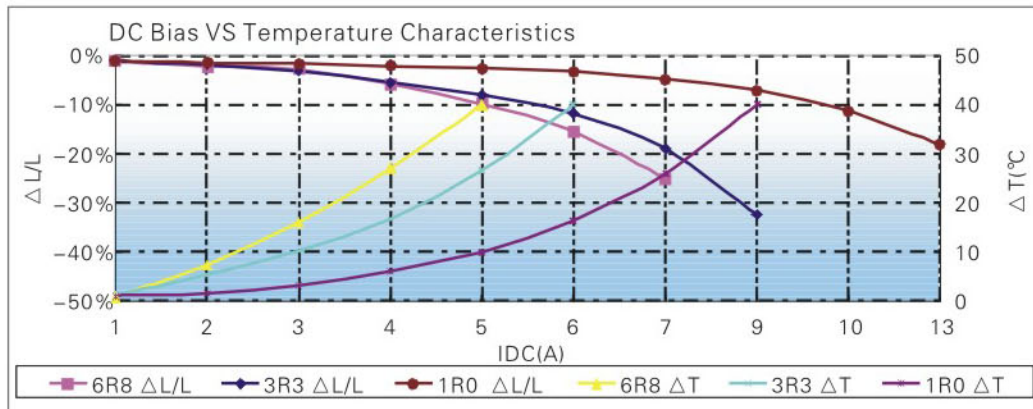

* 规格和参数仅供参考，更多的型号与规格，请关注我司网站或来电咨询。
The specifications and parameters are for reference only. More model and specification, Pay attention to our website or to inquire.