


PHYSICAL DIMENSIONS:


A	10.87	[.428]	±	0.15	[.006]
B	10.87	[.428]	±	0.15	[.006]
B ₁	13.46	[.530]		MAX	
C	6.35	[.250]	±	0.10	[.004]
C ₁	7.11	[.280]	±	MAX	
D	7.62	[.300]	±	0.13	[.005]
E	2.54	[.100]	±	0.13	[.005]
T ₁	2.64	[.104]	±	0.25	[.010]
T ₂	0.64	[.025]	±	TYP.	
T ₃	0.38	[.015]	±	TYP.	

29F0430-2SR-10


**UNCONTROLLED
DOCUMENT**

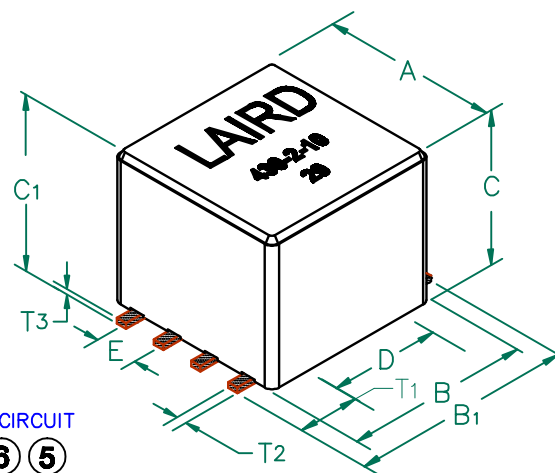


EQUIVALENT CIRCUIT




|Z|, R, AND X vs. FREQUENCY

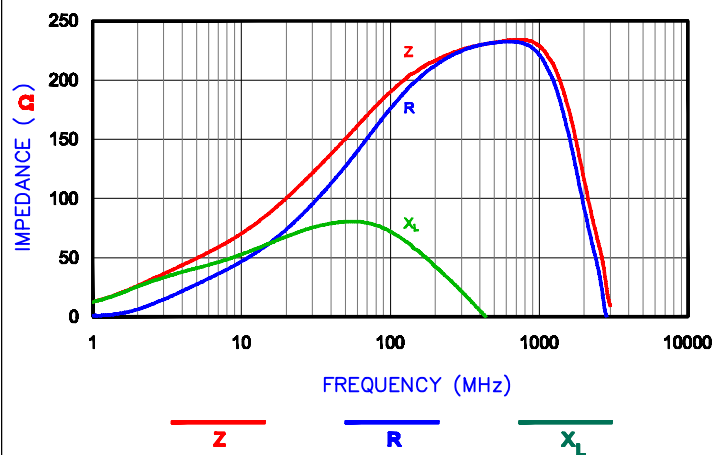

LAND PATTERNS FOR REFLOW SOLDERING

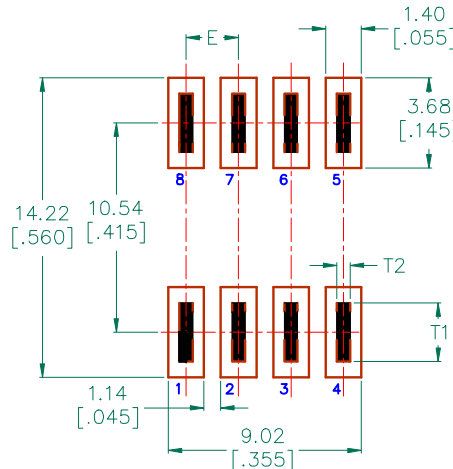

RECOMMENDED SOLDERING CONDITIONS

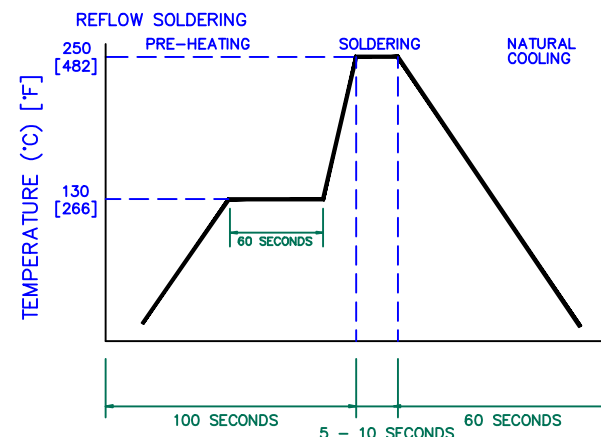

DIMENSIONS ARE IN MM [INCHES].			This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		
E	UPDATE COMPANY LOGO AND ROHS SYM ADD EQUIV. CIRCUIT CHG KAPTON LABEL	10/27/08	JRK	29F0430-2SR-10	
D	UPDATE COMPANY LOGO	05/02/07	JRK		
C	UPDATE CURVE & TEST REF DATA	04/06/06	JRK		
B	UPDATE FORMAT ADD ROHS SYMBOL	08/27/04	JRK		
A	ORIGINAL DRAFT	05/14/04	JRK		
REV	DESCRIPTION	DATE	INT	PROJECT/PART NUMBER: 29F0430-2SR-10-E-2 DATE: 05/14/04 SCALE: NTS TOOL # H0431	REV E DRAWN BY: JRK SHEET: 2 OF 3