




SCC Series Time Lag Type



Structure

No.	Component	Material
1	Wire	Alloy
2	Cap	Brass with nickel plated
3	Body	Ceramic tube

Electrical characteristics

Rated current	135%	200%	1000%
	Max	Max	Min.
100 mA~10A	1 hour	120 Sec.	10 mS

Breaking capacity

10,000 A	125 V	A C
35 A	250 V	A C (less or 1 A)
100 A	250 V	A C (1.1 A ~3.5 A)
200 A	250 V	A C (3.6 A ~10A)

Temperature character

When 100% of rating the temperature rise doesn't exceed 75°C.


Approvals

Catalogue number	Rated current	Voltage	UL	PSE
SCC	100mA~800mA	125V / 250V	●	●
	1A~10A	125V / 250V	●	●

● Approved 已認證 ○ Pending 認證中



SCP Series Time Lag Type With Pigtail

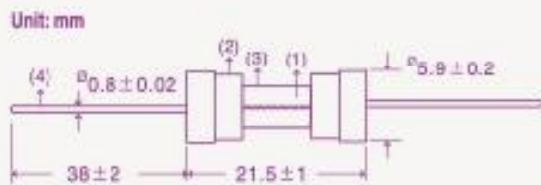

Structure

No.	Component	Material
1	Wire	Alloy
2	Cap	Brass with nickel plated
3	Body	Ceramic tube
4	Lead	Tinned copper wire

Electrical characteristics

Rated current	135%	200%	1000%
	Max	Max	Min.
100 mA~10A	1 hour	120 Sec.	10 mS

Breaking capacity

10,000 A	125 V	A C
35 A	250 V	A C (less or 1 A)
100 A	250 V	A C (1.1 A ~3.5 A)
200 A	250 V	A C (3.6 A ~10A)

Temperature character

When 100% of rating the temperature rise doesn't exceed 75°C.

Approvals

Catalogue number	Rated current	Voltage	UL	PSE
SCP	100mA~800mA	125V / 250V	●	●
	1A~10A	125V / 250V	●	●

● Approved 已認證 ○ Pending 認證中

SCC/SCP

Rating	Norminal Melting(A ² Sec)
100mA	<i>0.03800</i>
125mA	<i>0.04000</i>
150mA	
160mA	
200mA	<i>0.15500</i>
250mA	<i>0.20500</i>
300mA	<i>0.45000</i>
315mA	<i>0.46000</i>
350mA	<i>0.46200</i>
375mA	<i>0.97000</i>
400mA	<i>0.98000</i>
500mA	<i>1.89000</i>
600mA	<i>3.01000</i>
630mA	<i>3.05000</i>
700mA	<i>3.20000</i>
750mA	<i>3.25000</i>
800mA	<i>3.30000</i>
1A	<i>3.34000</i>
1.25A	<i>15.08000</i>
1.5A	<i>21.29000</i>
1.6A	<i>30.03000</i>
2A	<i>40.67000</i>
2.5A	<i>61.00000</i>
3A	<i>98.02000</i>
3.15A	<i>96.59000</i>
3.5A	<i>113.53000</i>
4A	<i>158.72000</i>
5A	<i>295.24000</i>
6A	
6.3A	<i>439.40000</i>
7A	<i>179.18000</i>
8A	<i>248.00000</i>
9A	
10A	<i>393.75000</i>
11A	
12A	
13A	
14A	
15A	

001

PS :

以上數值僅供參考

Above Norminal Melting vaules are for reference only.

若有其它考求時與業務人員聯絡

If you need other ratings please don't hesitate to contact the salesperson.