





B

RCSB Series 系列 贴片组立式大电流电感 RCSB 系列

RCSB 18 Series 系列



1:1

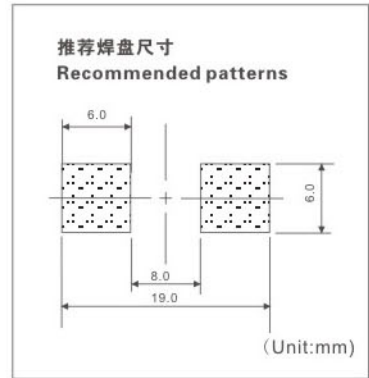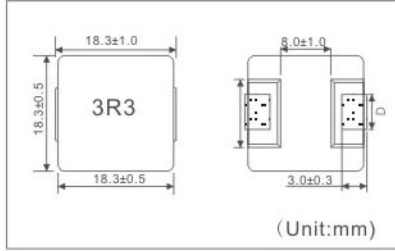


电气性能 Electrical characteristics

RCSB 1810 系列

产品编号 Part No.	电感值 Inductance L(uH) ± 20%	直流电阻(mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A)Max	尺寸(单位: mm) Dimensions(unit:mm)	
			Max			H ± 0.4	D:Ref
RCSB1810-R82M	0.82		2.0	41.0	65.0	9.0	3.0
RCSB1810-1R2M	1.2		2.4	34.0	62.0	9.0	3.0
RCSB1810-2R0M	2.0		4.5	30.0	52.0	9.0	3.0
RCSB1810-2R5M	2.5		5.0	29.0	48.0	9.0	3.0
RCSB1810-3R3M	3.3		8.0	22.0	37.0	9.0	3.0
RCSB1810-4R7M	4.7		10.0	20.0	35.0	9.0	3.0
RCSB1810-5R6M	5.6		11.0	17.0	32.0	9.0	3.0
RCSB1810-6R8M	6.8		12.0	15.0	27.0	9.0	3.0
RCSB1810-100M	10.0		15.0	14.0	20.0	9.0	3.0
RCSB1810-150M	15.0		18.0	12.0	14.0	9.0	3.0
RCSB1810-220M	22.0		20.0	8.0	11.0	9.0	3.0
RCSB1810-330M	33.0		30.0	6.0	8.0	9.0	3.0
RCSB1810-470M	47.0		45.0	4.5	7.0	9.0	3.0

直流重叠、温升特性曲线图 DC Bias & Temperature Characteristics

RCSB 1810 系列

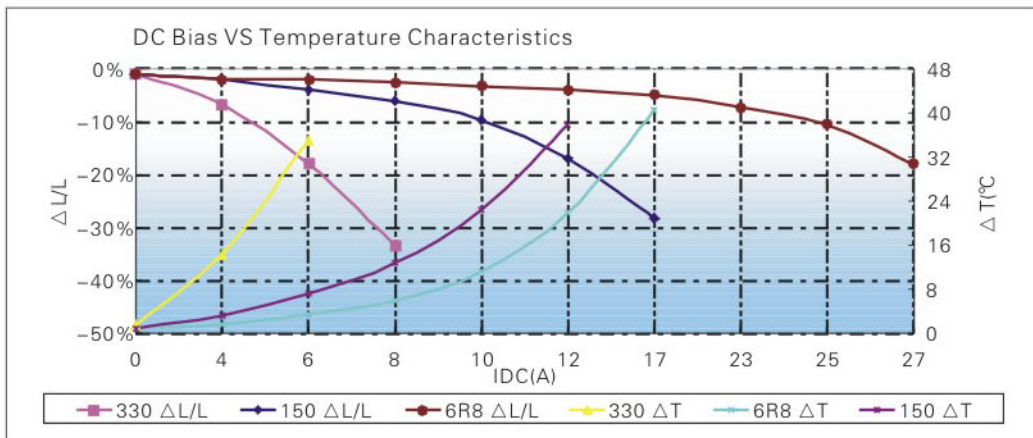

* 规格和参数仅供参考，更多的型号与规格，请关注我司网站或来电咨询。
The specifications and parameters are for reference only. More model and specification, Pay attention to our website or to inquire.